

### General Description

The STP10DF59L6 infrared thermopile sensor for non-contact temperature measurement is a thermopile sensor having an output signal voltage directly proportional to the incident infrared (IR) radiation power. Thanks to the anti-electromagnetic interference design, STP10DF59L6 is robust for all kinds of application environment. The sensor window integrated optical lens improves the sensor's DS ratio through optical optimization design. The STP10DF59L6 comprising a new type CMOS compatible thermopile sensor chip features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. A high-precision thermistor reference chip is also integrated for ambient temperature compensation.

### Features and Benefits

- High responsivity, High Signal-Noise ratio
- Small size, high reliability, 4-pin metal housing TO-5
- Operating Temperature Range: -40°C to +125°C
- Anti-electromagnetic interference

### Applications


- Non-contact temperature measurement
- Pyrometer, Thermometer

### Electrical Characteristics (vs = 5.0V, TA = +25°C, unless otherwise noted. )


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
RTP	Thermopile resistance		85	105	125	KΩ
R	Responsivity	500K, with filter cut-on 5.5 um	52	67	82	V/W
τ	Time constant			15		ms
VN	Noise voltage	Johnson-noise		43		nv/Hz <sup>1/2</sup>
D*	Specific detectivity			1.02*10 <sup>8</sup>		cmHz <sup>1/2</sup> /W
FOV	Field of View	At 50% intensity points	11	13	15	°
TCRTP	TC of resistance	-40°C ~100°C	200	300	400	ppm/K
<i>Thermistor</i>						
Rth	Thermistor resistance	25°C	95	100	105	KΩ
β	B-value		3930	3950	3970	

### Optical Characteristics

Field of View

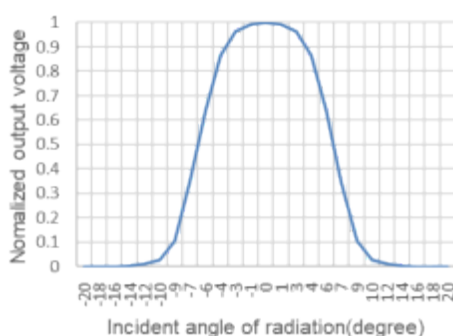


Filter parameters

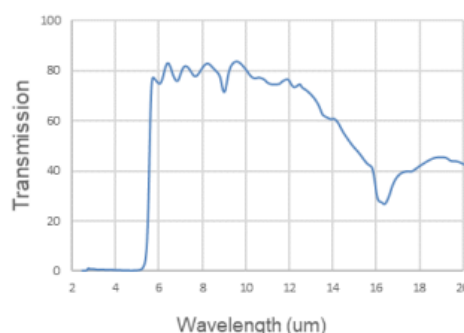

## Mechanical Drawings

Unit:mm

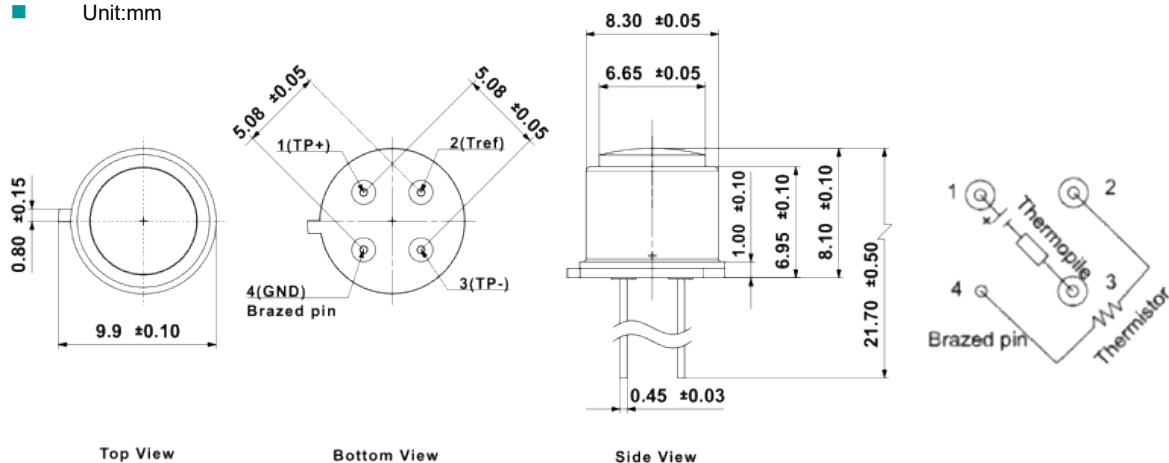

## Pin Definitions and Descriptions

Symbol	Pin	Pin Type	Conditions
TP+	1	O	Thermopile positive
Tref	2	I	Thermistor positive
TP-	3	O	Thermopile negative
GND	4	O	Thermistor negative

## Revision History

Revision Number	Release Date	Description
Rev1	2021/7/19	Initial Release
Rev2	2022/3/18	Update the mechanical drawings.