

### General Description

The STP9CF55H infrared thermopile sensor for non-contact temperature measurement is a thermopile sensor having an output signal voltage directly proportional to the incident infrared (IR) radiation power. Thanks to the anti-electromagnetic interference design, STP9CF55H is robust for all kinds of application environment.

The STP9CF55H comprising a new type CMOS compatible thermopile sensor chip features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. A high-precision thermistor reference chip is also integrated for ambient temperature compensation.

### Features and Benefits

- High responsivity, High Signal-Noise ratio
- Small size, high reliability, 4-pin metal housing TO-46
- Operating Temperature Range: -40°C to +125°C
- Anti-electromagnetic interference

### Applications


- Non-contact temperature measurement
- Pyrometer, Thermometer

### Electrical Characteristics (TA = +25°C, unless otherwise noted.)


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
R <sub>TP</sub>	Thermopile resistance		55	75	95	KΩ
R	Responsivity	500K, with filter cut-on 5.5 μm	160	210	260	V/W
τ	Time constant			15		ms
V <sub>N</sub>	Noise voltage	Johnson-noise		35.2		nV/Hz <sup>1/2</sup>
D*	Specific detectivity			2.1*10 <sup>8</sup>		cmHz <sup>1/2</sup> /W
FOV	Field of View	At 50% intensity points	85	90	95	°
TC <sub>RTP</sub>	TC of resistance	-40°C ~100°C	400	800	1200	ppm/K
<i>Thermistor</i>						
R <sub>th</sub>	Thermistor resistance	25° C	99.4	100	100.6	KΩ
β	B-value		3930	3950	3970	

### Optical Characteristics


Optical characteristics

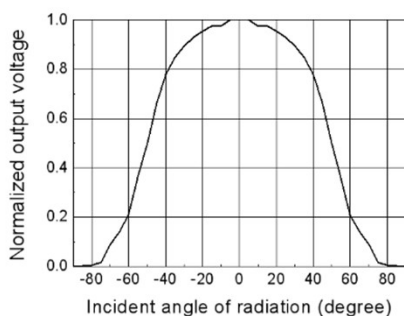

Filter parameters

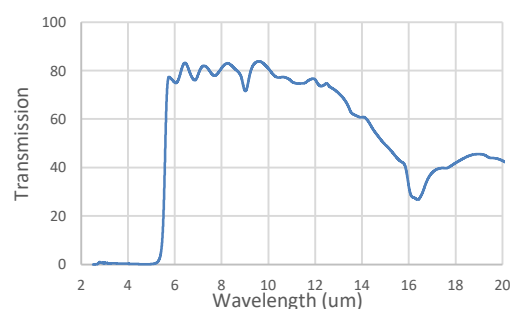

### Mechanical Drawings

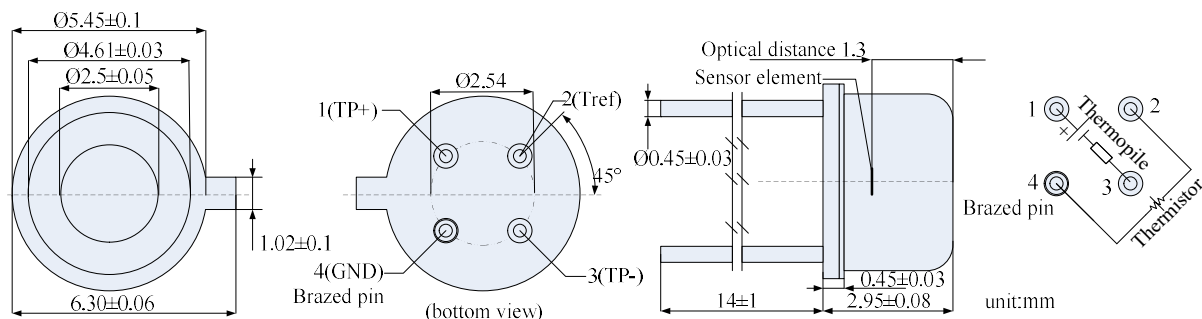

### Revision History

Revision Number	Release Date	Description
Rev1	2021/3/12	Initial Release