

General Description

The YY-MDA is a digital infrared thermopile sensor that facilitates the non-contact temperature measurement. Housed in a small TO-5 package with digital interface, the sensor integrates thermopile sensor, amplifier, A/D, DSP, MUX and communication protocol.

The YY-MDA is factory calibrated in wide temperature ranges: -40°C~85°C for the ambient temperature and -20°C~300°C for the object temperature. The measured temperature value is the average temperature of all objects in the Field of View of the sensor.

The YY-MDA offers a standard accuracy of ±2% around room temperatures. The digital platform supports easy integration. Its low power budget makes it ideal for battery powered applications, including household electrical appliances, environmental monitoring, HVAC, smart home/building control and IOT.


Features and Benefits

- Digital temperature output
- Factory calibrated in wide temperature ranges
- Communication protocol and Easy integration
- Reduced system component
- 2.7V to 5.5V Wide Supply Voltage Range
- Operating Temperature Range: -40°C to +85°C

Applications

- Consumer electronic
- Household electrical appliances
- HVAC
- IOT

Block Diagram

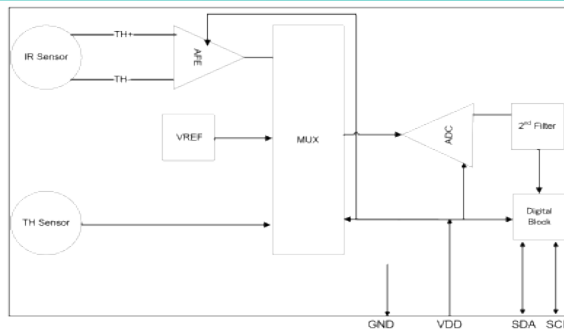


Electrical Characteristics (vs = 5.0V, TA = +25°C, unless otherwise noted.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Supply voltage		2.7	3.3	5.5	V
I _{DD}	Supply current	Continuous mode		1		mA
		Sleep Mode		2.8		μA
T _{obj}	Object temperature range		-20	-	300	°C
T _{Res}	Resolution of reading			0.1		°C
FOV	Field of View		7	8	9	Deg
I ² S	Interface speed		-	50		kHz
SA	Slave address			0x20		
DRR	Data refresh rate			1		Hz
I _{leak}	SCL, SDA Leakage			0.1		μA
	SDA Output logic low	IOL=3 mA			VDD*0.2	V
	SDA Output logic high	IOH=-50 uA	VDD*0.9			V
	SCL, SDA Input logic low				VDD*0.2	V
	SCL, SDA Input logic high		VDD*0.8			V




Optical Characteristics

Optical characteristics

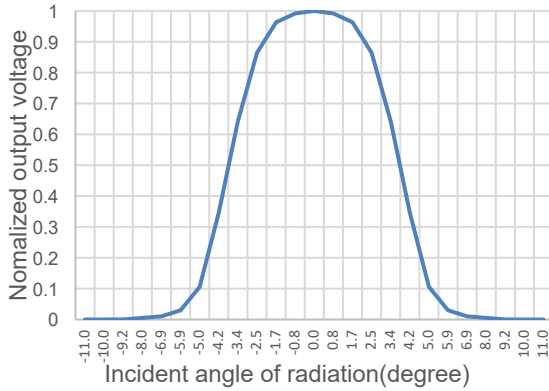


Filter parameters

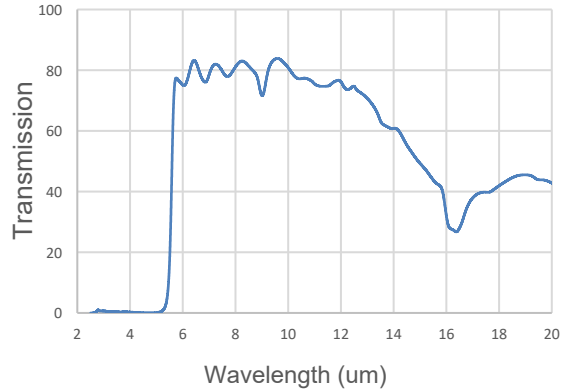

Mechanical Drawings

Unit:mm

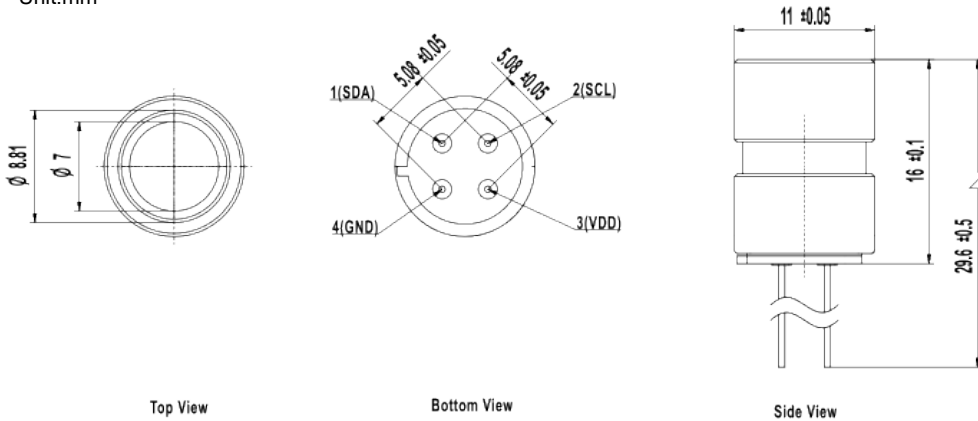

Pin Definitions and Descriptions

Pin Name	Pin	Pin Type	Functions description
SDA	1	IO	IIC Serial Data Input/Output
SCL	2	IO	IIC Serial Clock Input/Output
VDD	3	P	Connect to VDD
GND	4	P	Connect to GND

Revision History

Revision Number	Date	Notes
Rev1	2021/6/11	Initial Release
Rev2	2022/3/18	Add mechanical unit.

